


CLAIDDING & SOFFITS Nail Strip - Snap Lock

Rendering



Profile

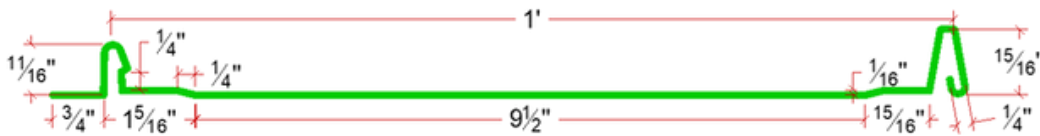

Technical specifications

Details	Panel Options	Testing
Maximum Length 24 GA 2' minimum and 8' maximum	Panel widths SSQ: 12" TO 24" (304.8 TO 609.6) COVERAGE SSH: 12" TO 20" (304.8 TO 508.0) COVERAGE SSR: 11" TO 16" (279.4 TO 406.4) COVERAGE	Uplift Test ASTM E1592 (FW Panel)
22 GA 2' minimum and 15' maximum Manufacturing Facilities Moncton, NB	Pan configurations Inverted Plank, Flat, Vee Grooves Reveal Options 1" to 3" (panel remains at 12" and reveal size increases coverage)	Notes: 1. Material usage: 41/16" APPROX. 2. Clip relief rollers are standard with panel 3. Panel is shown with clip relief rollers engaged. 4. Dual dimensions: Inch - mm
	Coating Kynar 500® (PVDF)	
	Substrate Standard 24 GA Galvalume Optional 22 GA Galvalume	